




**B1729AC**

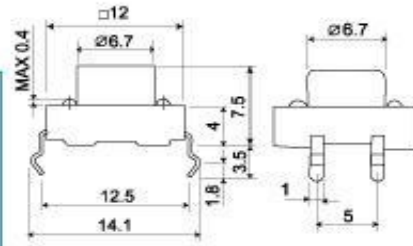

Rating : 50mA 12V DC.  
Travel :  $0.3 \pm 0.15$ mm.  
Contact resistance : 100m $\Omega$  Max.  
Operating force : 130, 160, 250  $\pm$  50g.  
Life : 100,000 Cycles Min.