

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

SPECIFICATION

MATERIAL

Housing:PBT+5%PC UL94V-0

Contacts:PhosPhor Bronze

CONTACT PLATING

G=GOLD FLASH PLATED ALL OVER, Ni UNDER PLATED ALL OVER.

T=TIN PLATED ALL OVER, Ni UNDER PLATED ALL OVER.

S=GOLD FLASH PLATED ON CONTACT AREA, TIN PLATED ON SOLDER TAIL, Ni UNDER PLATED ALL OVER.

ELECTRICAL


Current rating: 2 Amps .

Contact resistance: 20 mohms initial

Insulation resistance: 100000 Mohms min @ 500 VDC


Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55° C TO +125° C

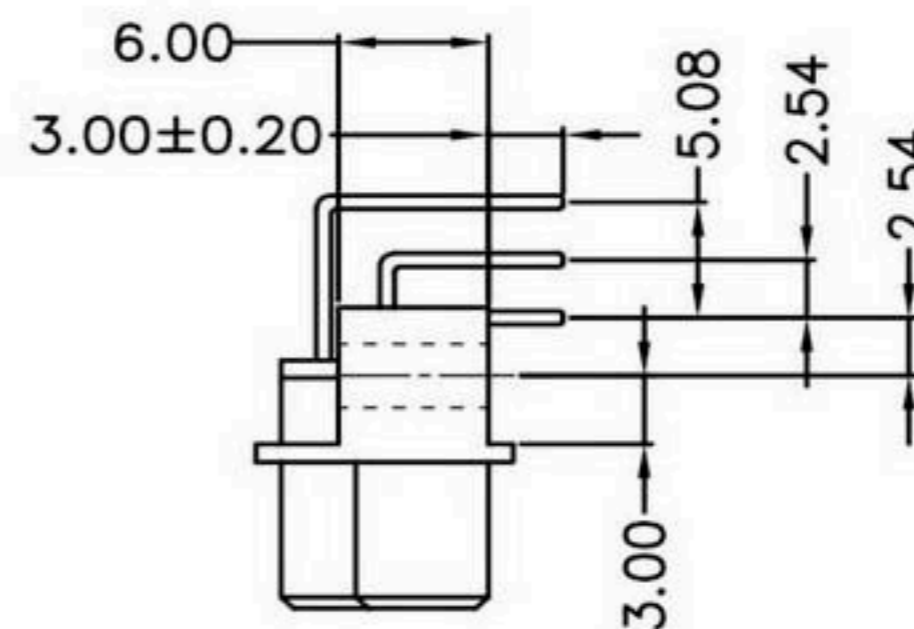

RoHS
Compliant

APPD.
核准



TOLERANCE
容許公差

PART NAME

DWG.
製圖

SCALE
比例

.0 ± 0.2
.00 ± 0.15
ANG. ± 2°

DIN41612 2.54mm DIP TYPE 90° 48P
SIZE-A+B+C 48P FEMALE ROHS

DATE 制表日

UNIT
單位

SIZE
紙張尺寸

PART NO.

2012/2/24

PAGE
張數

REV.
版本

EH3X1690

1

2

3

4

5

6

7

8