


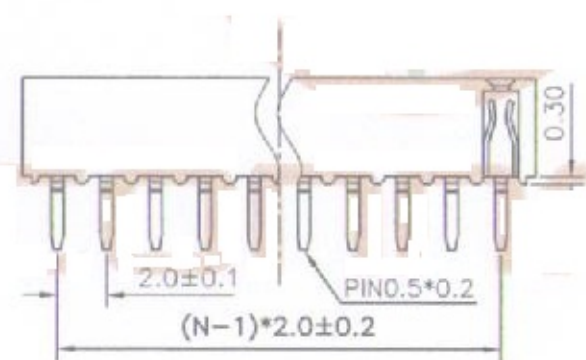


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/22/05'		LJC 09/22/05'

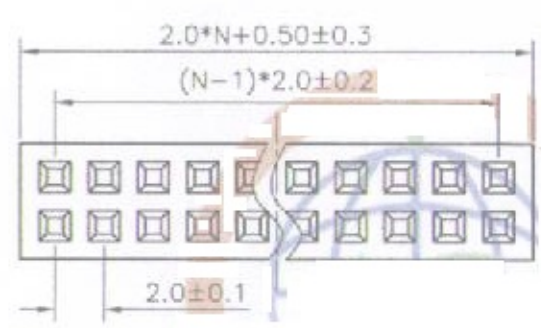

N: NUMBER OF CONTACTS/2

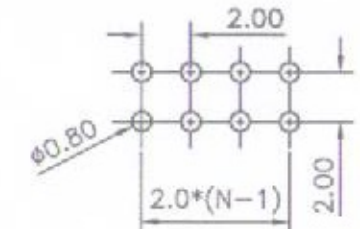

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - OPERATING TEMPERATURE: 0°C~+85°C.
  - STORAGE TEMPERATURE: -20°C~+70°C.
- PART NUMBER: DS1026-05
- PRODUCT NUMBER CODE:  
DS1026-05 - X X X X X

- CONTACTS TYPE  
V:VERTICAL TYPE
- HOUSING COLOR  
B:BLACK
- CONTACT PLATING  
B: FULL GOLD FLASH
- CONNECTOR TYPE  
S:SOCKET
- No.OF CONTACTS  
2\*2~2\*X
- SERIES No.  
DS1026-05

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE	FEMALE HEADER PITCH 2.0mm
X. ±0.60	X. ±5'	UNITS mm		Vertical Through TYPE
.X ±0.38	.X ±3'	SHEET SIZE A4	SERIES	
.XX ±0.25	.XX ±2'			
DRAWING TYPE	CUSTOMER	<b>H2I-2X _ _</b>		
SCALE	1:1 SHEET			
DRAWING NO.	C-DS1026-05-XXXXX			