


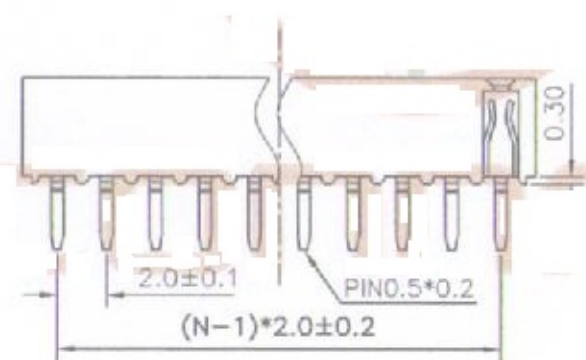


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/22/05'		LJC 09/22/05'

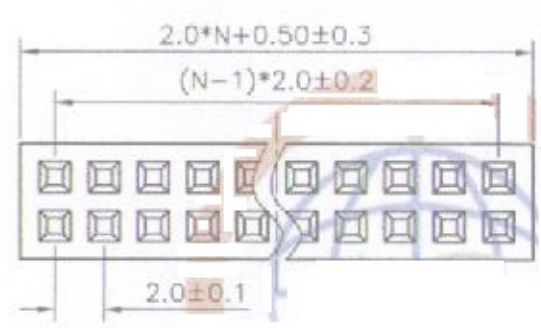

N: NUMBER OF CONTACTS/2

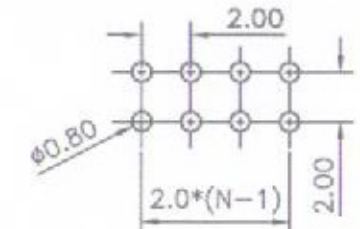


RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.

- PART NUMBER: DS1026-05
- PRODUCT NUMBER CODE:
DS1026-05 - X X X X X

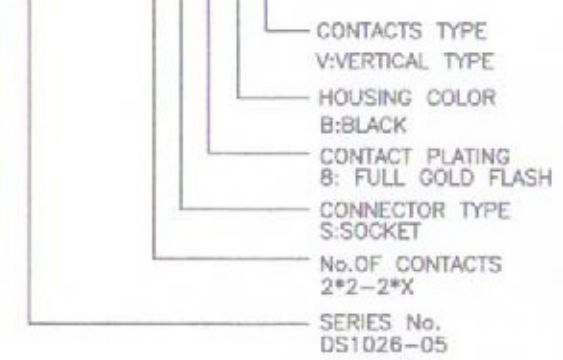

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FEMALE HEADER PITCH 2.0mm
X.	±0.60	X.	±5'	UNITS	mm		Vertical Through TYPE
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	
.XX	±0.25	.XX	±2'				
DRAWING TYPE		CUSTOMER		<h1>H2I-2X _ _</h1>			
SCALE		1:1					
DRAWING NO.		C-DS1026-05-XXXXX					