

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C


D

E


F

G

H

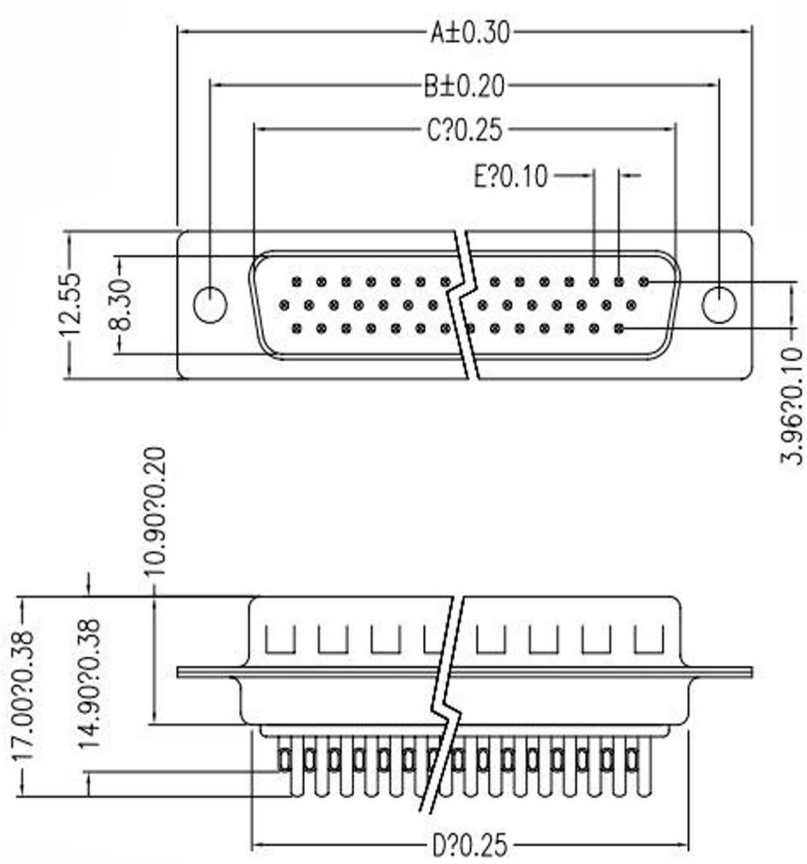

| PIN | A | B | C | D | E |
|-----|-------|-------|-------|-------|------|
| 15 | 30.80 | 24.99 | 16.90 | 19.30 | 2.29 |
| 26 | 39.20 | 33.30 | 25.25 | 27.60 | 2.29 |
| 44 | 53.10 | 47.04 | 38.96 | 41.10 | 2.29 |
| 62 | 69.34 | 63.50 | 55.42 | 57.30 | 2.41 |



MATERIAL:

- 1. Insulator: PBT+30%Glass Fiber (UL94V-0)
- 2. Contact: Brass
- 3. Contact Plated: Gold Flash over Tin Or Gold Plated Or Tin Plated
- 4. Shell: Steel, Nickel Plated

SPECIFICATION:

- 1. Current Rating: 5 AMPS
- 2. Insulation Resistance: 1000M Ω MIN. At 500VDC
- 3. Dielectric Strength: 500V for One minute
- 4. Operation Temperature: -55? ~+105? .

RoHS Compliant

| | | | | |
|-------------|------------|--------------------|--|---|
| APPD. 核准 | BETTY | SCALE 比例 参考 | TOLERANCE | PART NAME H.D. D-SUB SOLDER TYPE STAMPED PIN XXP MALE THROUGH HOLE NICKEL SHELL+DIMPLE BLACK INSULATOR |
| DWG. 製圖 | BETTY | | .01±0.01 .02±0.02 .05±0.05 .10±0.10 | |
| DATE 制表日 | 2009/09/23 | UNIT 單位 | M M | PART NO. M15HD / M26HD / M44HD / M62HD |
| | | PAGE 張數 | 1 OF 1 | |
| | | REV. 版次 | A | |

1 2 3 4 5 6 7 8