

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C


D

E


F

G

H

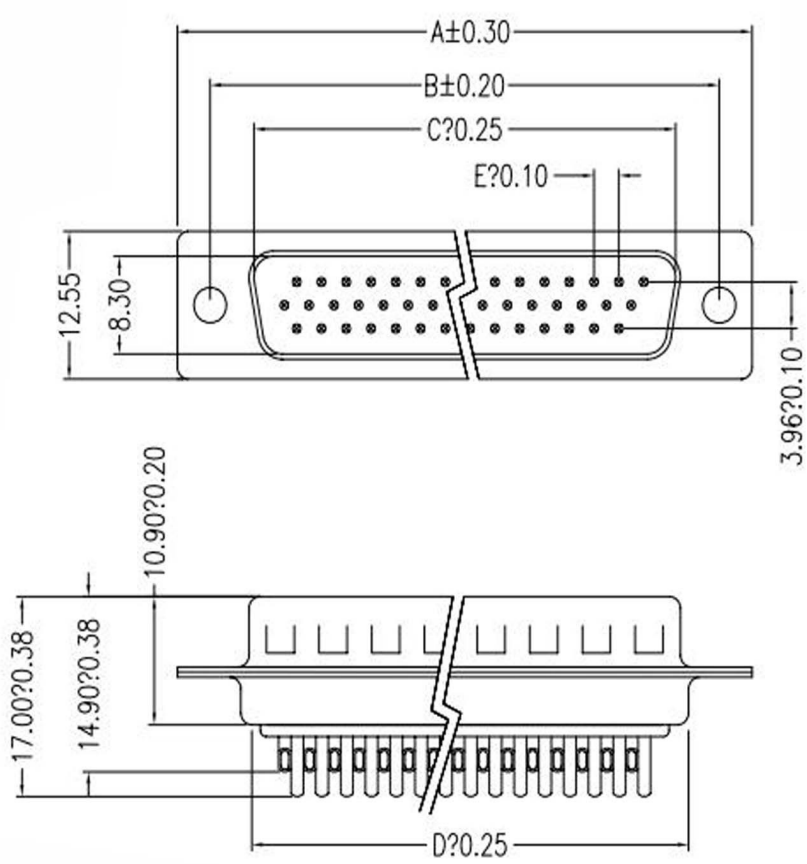

PIN	A	B	C	D	E
15	30.80	24.99	16.90	19.30	2.29
26	39.20	33.30	25.25	27.60	2.29
44	53.10	47.04	38.96	41.10	2.29
62	69.34	63.50	55.42	57.30	2.41



**MATERIAL:**

- 1. Insulator: PBT+30%Glass Fiber (UL94V-0)
- 2. Contact: Brass
- 3. Contact Plated: Gold Flash over Tin Or Gold Plated Or Tin Plated
- 4. Shell: Steel, Nickel Plated

**SPECIFICATION:**

- 1. Current Rating: 5 AMPS
- 2. Insulation Resistance: 1000M Ω MIN. At 500VDC
- 3. Dielectric Strength: 500V for One minute
- 4. Operation Temperature: -55? ~+105? .

**RoHS Compliant**

APPD. 核准	BETTY	 SCALE 比例 参考	TOLERANCE	PART NAME H.D. D-SUB SOLDER TYPE STAMPED PIN XXP MALE THROUGH HOLE NICKEL SHELL+DIMPLE BLACK INSULATOR
DWG. 製圖	BETTY		.01±0.30 .004±0.25 .000±0.05	
DATE 制表日	2009/09/23	UNIT 單位	M M	PART NO. M15HD / M26HD / M44HD / M62HD
		PAGE 張數	1 OF 1	
		REV. 版次	A	

1 2 3 4 5 6 7 8