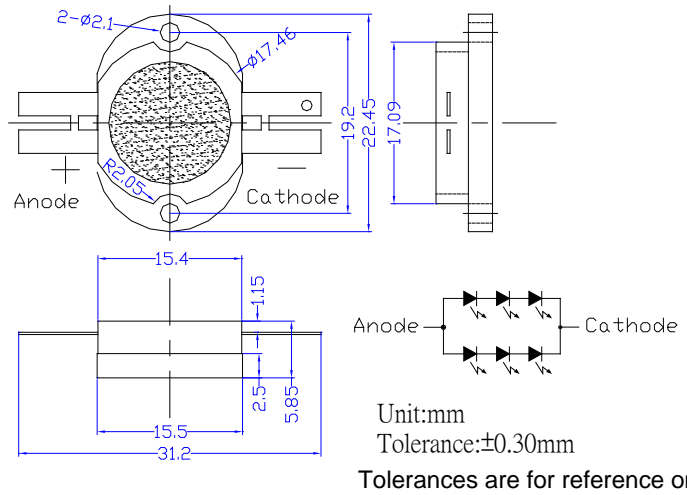


**■ Features**

- High-power LED
- Long lifetime operation
- Typical viewing angle : 140deg
- RoHS compliant
- Possible to attach to heat sink directly without using print circuit board.


**■ Applications**

- Indoor & outdoor lighting
- Stage lighting
- Reading lamps
- Display cases, furniture illumination, marker
- Architectural illumination
- Spotlights

**■ Outline Dimension**

**■ Absolute Maximum Rating**

(Ta=25°C)
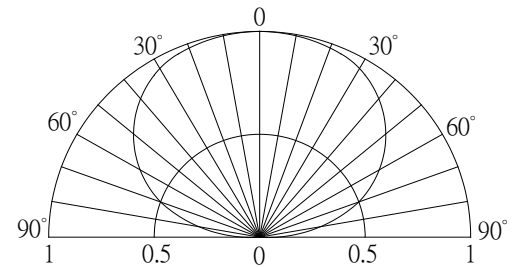
| Item                       | Symbol           | Value      | Unit |
|----------------------------|------------------|------------|------|
| DC Forward Current *1      | I <sub>F</sub>   | 1,400      | mA   |
| Pulse Forward Current*2    | I <sub>FP</sub>  | 2,000      | mA   |
| Reverse Voltage            | V <sub>R</sub>   | 15         | V    |
| Power Dissipation*1        | P <sub>D</sub>   | 15,960     | mW   |
| Operating Temperature      | T <sub>opr</sub> | -30 ~ +85  | °C   |
| Storage Temperature        | T <sub>stg</sub> | -40 ~ +100 | °C   |
| Lead Soldering Temperature | T <sub>sol</sub> | 260°C5sec  | -    |

**■ Directivity**


\*1, Power dissipation and forward current are the value when the module temperature is set lower than the rating by using an adequate heat sink.

\*2, Pulse width Max.10ms Duty ratio max 1/10

**■ Electrical -Optical Characteristics**

(Ta=25°C)

| Item                      | Symbol            | Condition              | Min. | Typ. | Max. | Unit |
|---------------------------|-------------------|------------------------|------|------|------|------|
| DC Forward Voltage        | V <sub>F</sub>    | I <sub>F</sub> =1000mA | 8.7  | 10   | 11.4 | V    |
| DC Reverse Current        | I <sub>R</sub>    | V <sub>R</sub> =15V    | -    | -    | 20   | μA   |
| Luminous Flux             | Φ <sub>v</sub>    | I <sub>F</sub> =1000mA | 670  | 765  | -    | lm   |
| Color Temperature         | CCT               | I <sub>F</sub> =1000mA | -    | 3000 | -    | K    |
| Chromaticity Coordinates* | x                 | I <sub>F</sub> =1000mA | -    | 0.45 | -    |      |
|                           | y                 | I <sub>F</sub> =1000mA | -    | 0.41 | -    |      |
| 50% Power Angle           | 2θ <sub>1/2</sub> | I <sub>F</sub> =1000mA | -    | 140  | -    | deg  |

Note: Don't drive at rated current more than 5s without heat sink for High Power series.

\* Tolerance of chromaticity coordinates is ±10% , \* Tolerance of Luminous Flux is ±20%

**■ Heat design**

The following pictures show some measurements of mounted 5W Led on the heat sink for each board A and B (See Fig 1) with using thermograph to make an observation about heat distribution. Each boards is tested at various current conditions.

As a result, LED needs larger heat sink as much as possible to reduce its own case temperature.

**Fig. 1 Configuration pattern examples for board assembly**

| Board | LED power | Material | Surface area (mm <sup>2</sup> ) Min. |
|-------|-----------|----------|--------------------------------------|
| A     | 5W        | Al       | 10,300                               |
| B     | 10W       | Al       | 20,600                               |
| C     | 25W       | Al       | 51,500                               |
| D     | 50W       | Al       | 103,000                              |
| E     | 100W      | Al       | 206,000                              |
| F     | 200W      | Al       | 412,000                              |
| G     | 300W      | Al       | 618,000                              |

Above tested LED device is attached with adhesive sheet to the heatsink.

For reference's sake, Tj absolute maximum rating is defined at 115°C as a prerequisite on design process of 5W LED.

**<Fig.2> Board A (surface area=10,300mm<sup>2</sup>)**

**<Fig.3> Board B (surface area=20,600mm<sup>2</sup>)**

