


■Features

- High Luminous PLCC6 Top SMD LEDs
- 5.0x5.0x1.5mm Standard Directivity
- Long lifetime Operation
- Superior Weather-resistance
- Yellow Diffused Type

■Applications

- Backlighting (switches, keys, displays, illuminated advertising etc.)
- Substitution of Micro Incandescent Lamps
- Reading Lamps / Emergency Lighting
- Marker lights (e.g. steps, exit ways, etc.)
- Other Lighting

■Outline Dimension

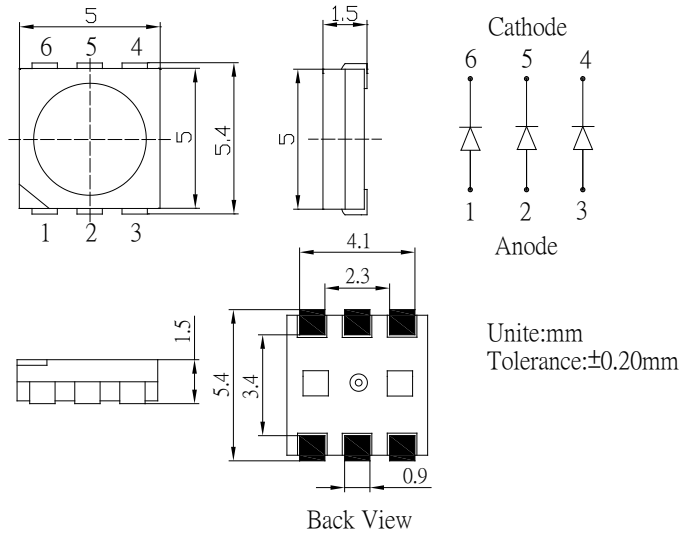

■Absolute Maximum Rating

(Ta=25 °C)

Item	Symbol	Value	Unit
DC Forward Current	I _F	3*40	mA
Pulse Forward Current*	I _{FP}	3*60	mA
Reverse Voltage	V _R	5	V
Power Dissipation	P _D	3*144	mW
Operating Temperature	T _{opr}	-30 ~ +85	°C
Storage Temperature	T _{stg}	-40~ +100	°C
Lead Soldering Temperature	T _{sol}	260°C5sec	-

*Pulse width Max.10ms Duty ratio max 1/10

■Electrical -Optical Characteristics

(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V _F	I _F =3*30mA	2.8	3.1	3.6	V
DC Reverse Current	I _R	V _R =5V	-	-	30	μA
Luminous Flux	Φ _v	I _F =3*30mA	35	40	-	lm
Luminous Intensity*	I _v	I _F =3*30mA	10000	12000	-	mcd
Color Temperature	CCT	I _F =3*30mA	5500	6500	8000	K
Chromaticity Coordinate*	x	I _F =3*30mA	-	0.31	-	
	y	I _F =3*30mA	-	0.33	-	
50% Power Angle	2θ _{1/2}	I _F =3*30mA	-	120	-	deg

*1 Luminous Intensity Measurement allowance is ±15%

*2 Chromaticity Coordinates Measurement allowance is ±10%

■Directivity

